


Project:	
Location:	
Model#: ROL5330K-24V-SS1	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




Highlight architectural features or add emphasis to landscaping. The IP67 rated a die-cast Aluminium housing make this fixture built to last. Suitable for dimming with TamLite controls.



PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

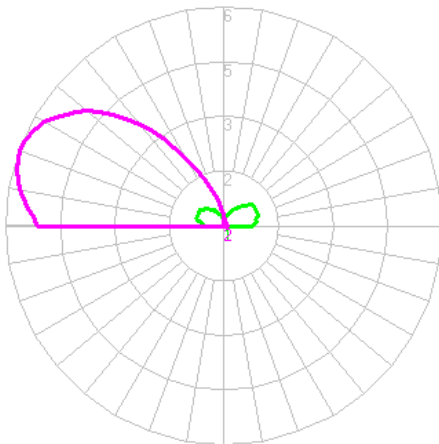

Initial Lumen Output: 10

Ambient Operating Temp: -20C to +40C

Environmental Rating(s): IP67


Limited Product Warranty: 3 Year(s)

UL Classification: Wet Location Listed

Project:	
Location:	
Model#: ROL5330K-24V-SS1	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

SPD

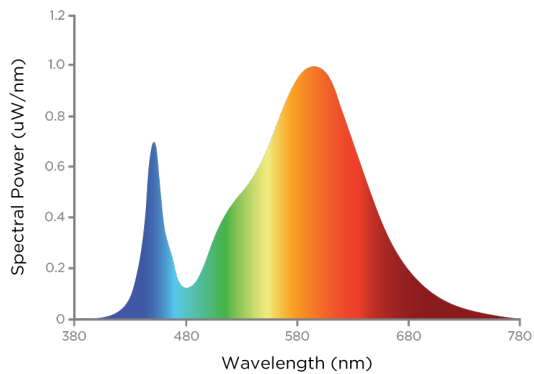

Source Type: LED

Colour Temperature: 3000K

ELECTRICAL SPECIFICATIONS

Input Voltage: 24Vdc

Dimming: Suitable for dimming with Tamlite Controls

Fixture Draw: 3.00 W

Over Temperature Protection: Auto recovery. Current returns to normal after over temperature is removed.

Max On-Delay: 1S

PHYSICAL SPECIFICATIONS

Finish Colour: Chrome Plated Stainless Steel

Housing Material: Die-cast Aluminium

Wiring: IP67 rated connections by others

Mounting: Recessed In-ground

SHIPPING INFORMATION

OrderingCode(s): ROL5330K-24V-SS1

Box Weight: .750 kg

Box Quantity: 1

Box Dimensions (L-W-H): 125 x 125 x 125 mm

Project:	
Location:	
Model#: ROL5330K-24V-SS1	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

