

Project:	
Location:	
Model#: TLTP24-IP68-3KHLO-3M	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS



To supply Tamlite TLTP series of single colour 3000K LED Tape light. Tape shall use an integrated SMD LED cluster. Tape shall be 3oz Copper-PET Laminate rated at 5A. Tape shall be cuttable in intervals of 4 inches (101.6mm). Driver(24Vdc) and controls shall be external. Tape light shall be cETLus approved.



PERFORMANCE SPECIFICATIONS

Initial Lumen Output: 800

Ambient Operating Temp: -20C to +40C

Environmental Rating(s): IP68


Certification Standards: cETLus

UL Classification: Wet Location Listed

Limited Product Warranty: 5 Year(s)

LED SPECIFICATIONS

SPD

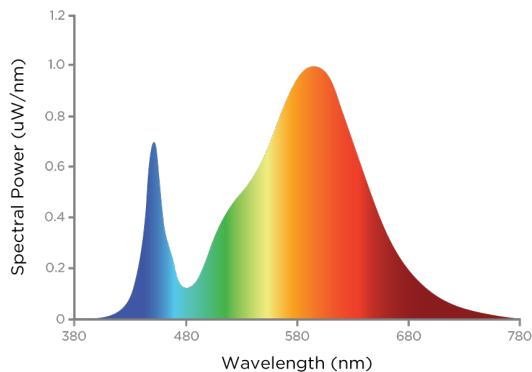

Source Type: LED

CRI: >90

Colour Temperature: 3000K

Project:	
Location:	
Model#: TLTP24-IP68-3KHLO-3M	Type:
Client:	Qty:
Prepared by:	Date:

ELECTRICAL SPECIFICATIONS


Driver Part Number: Sized and bought separately
Max On-Delay: < 1S

Input Voltage: 24Vdc
Dimming: With RF Controls

Fixture Draw: 14.4/m

LINE DRAWING

Line Drawings

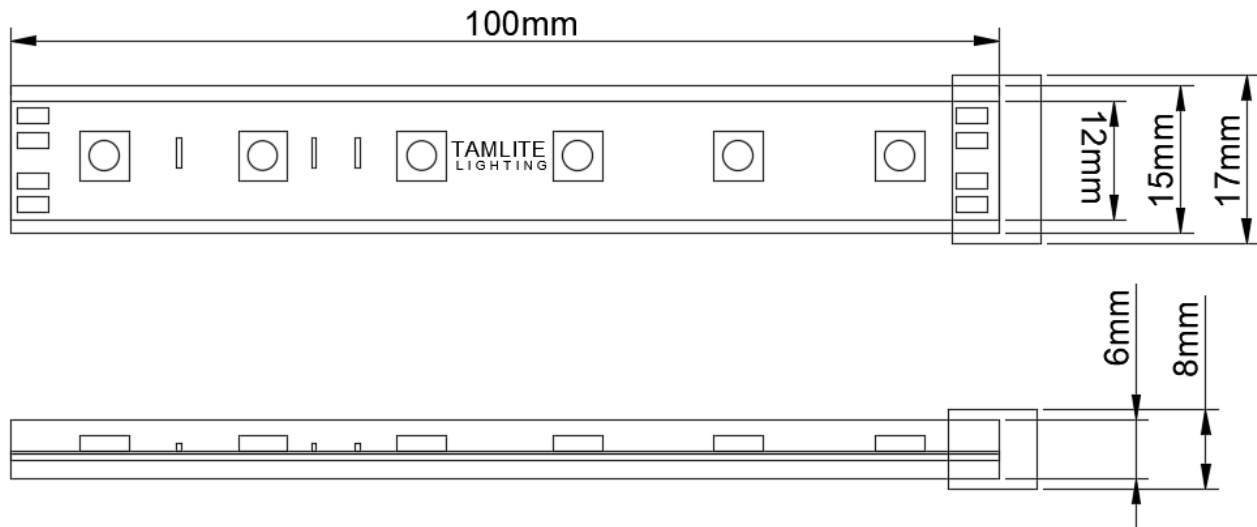

SERIES ARCHITECTURE

Optional Extras: Power Supplies Mounting Channels TLCN_XXX_24_X TLTP-5W50T TLTP-5W15C TLTP-5WBC TLTP-5WXC TLTP-5WTC TLTP-5WLC TLTP24-XX-CON