

Project:	
Location:	
Model#: PL330K-24V-WH	Type:
Client:	Qty:
Prepared by:	Date:


SERIES SPECIFICATIONS

Add a punch of light with the PL3 Puck Light. Trophies, glassware, collectables.



PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

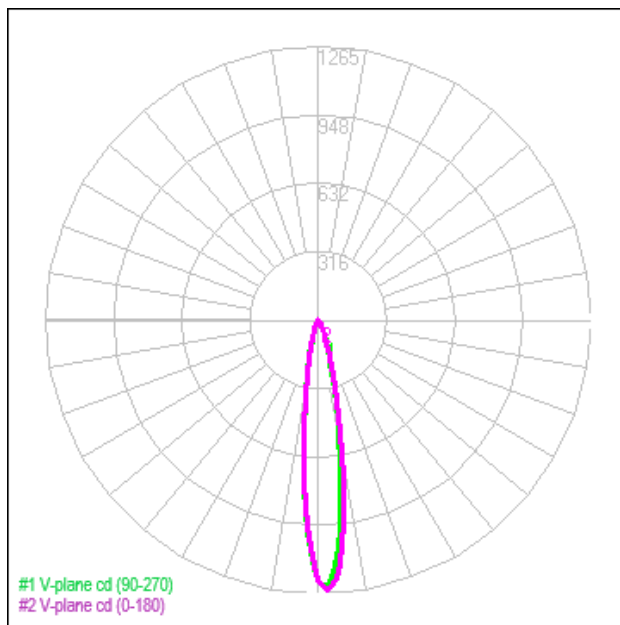


Initial Lumen Output: 178

Beam Angle: 16 deg

Efficacy: 59.19

Field Angle: 35 deg

Isolux Diagram

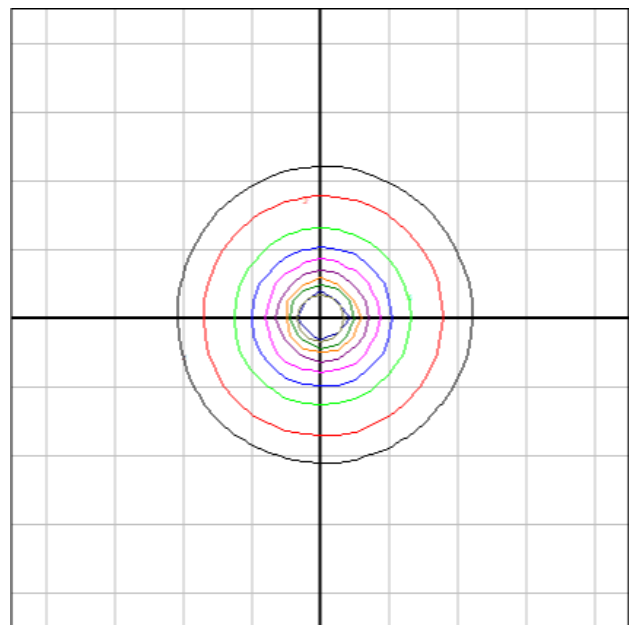


CBCP: 1,264 CD

Limited Product Warranty: 5 Year(s)

Project:	
Location:	
Model#: PL330K-24V-WH	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

SPD

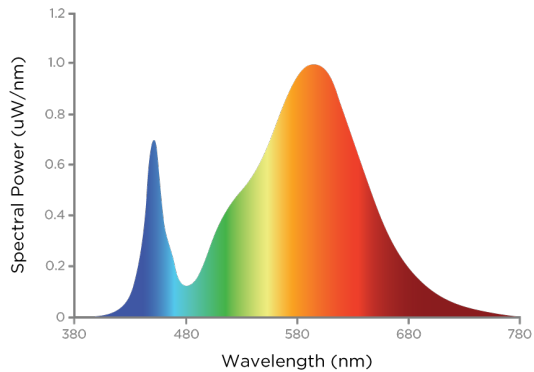

Source Type: LED

Colour Temperature: 3000K

ELECTRICAL SPECIFICATIONS

Input Voltage: 24Vdc

Fixture Draw: 3.00 W

Max On-Delay: < 1S

Dimming: With RF Controls

PHYSICAL SPECIFICATIONS

Finish Colour: White

Wiring: 2 wire

Mounting: Surface or Recessed 59mm dia.

SHIPPING INFORMATION

OrderingCode(s): PL330K-24V-WH

Box Weight: 0.10 kg


Box Quantity: 1

Box Dimensions (L-W-H): 65 x 65 x 20 mm

Project:	
Location:	
Model#: PL330K-24V-WH	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

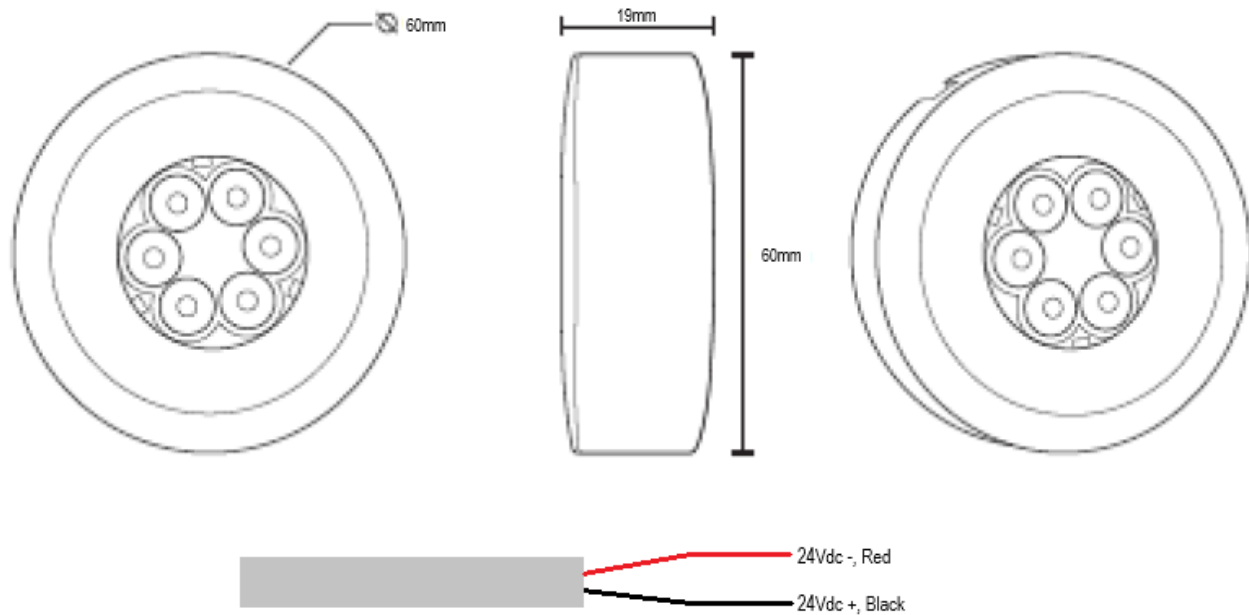

SERIES ARCHITECTURE

Optional Extras: PL-YCON