

Project:	
Location:	
Model#: AAFL12RGBWY-30D-24V	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS



Highlight architectural features or add emphasis to landscaping with the efficiency and flexibility of RGBW LED technology. Select from millions of colour combinations including 3000K white. The IP65 rated a die-cast Aluminium housing make this fixture built to last.



PERFORMANCE SPECIFICATIONS

Beam Angle: 30 deg

UL Classification: Wet Location Listed

Limited Product Warranty: 3 Year(s)

LED SPECIFICATIONS

Source Type: LED

Colour Temperature: RGB-W(5000K)

ELECTRICAL SPECIFICATIONS

Input Voltage: 24Vdc

Fixture Draw: 12.00 W

Max On-Delay: < 1S

Over Temperature Protection: Auto recovery. Current returns to normal after over temperature is removed.

PHYSICAL SPECIFICATIONS

Wiring: 1M - 5 conductor tail

Mounting: Yoke Mounting

Housing Material: Die-cast Aluminium

SHIPPING INFORMATION


OrderingCode(s): AAFL12RGBWY-30D-24V

Box Quantity: 1

Project:	
Location:	
Model#: AAFL12RGBWY-30D-24V	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

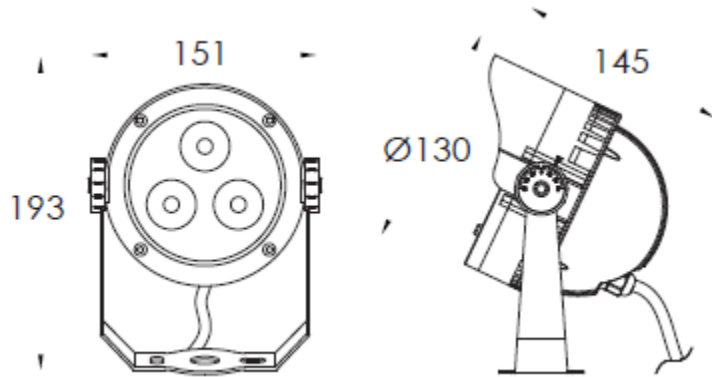

SERIES ARCHITECTURE

Series Architecture

AAFL -										
Part	Wattage	Colour		Mounting	Optics	Voltage		Finish		Options
AAFL	12 12W	RGBW3	Red, Green, Blue, White (3000K)	Y Yoke	8 8 Degree	120	120Vac	BZ	Black	TY Tuya Control ⁽¹⁾⁽²⁾
	36 36W				15 15 Degree	24	24Vdc ⁽³⁾	BK	Bronze	
	72 72W	RGBW5	Red, Green, Blue, White (5000K)		25 25 Degree			WH	White	
					30 30 Degree			CC	Custom	
					40 40 Degree					

1) Suitable for 120Vac versions only

2) Tuya phone app (iPhone or Android) by others

3) See Low Voltage Controls for more details

2022-11-17



Download the APP "TUYASMART" and register a new account or log in with an existing account.