

Project:	
Location:	
Model#: SLNB220SW-WRV	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




To supply TamLite's SLNB Series of LED Lensed Strip Fixtures as specified. The fixture shall operate at 120-347Vac and provide for three selectable wattage levels. The fixture shall provide for three CCT(35/40/5000K). The body shall be formed steel post-painted with a white polyester powder coat. Fixture to be cULus Listed and DLC Listed




PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

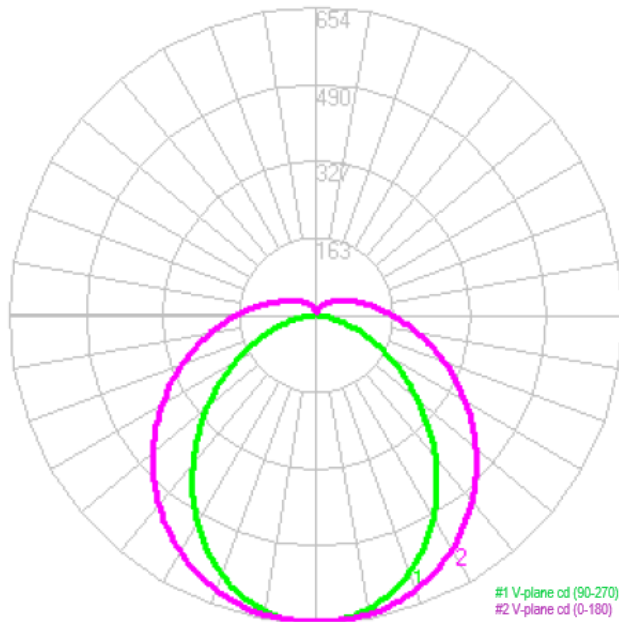

Initial Lumen Output: 2800lm
Beam Angle: 114 deg
Environmental Rating(s): IP44
Certification Standards: UL Safety US-CA, DLC
Limited Product Warranty: 5 Year(s)

Isolux Diagram

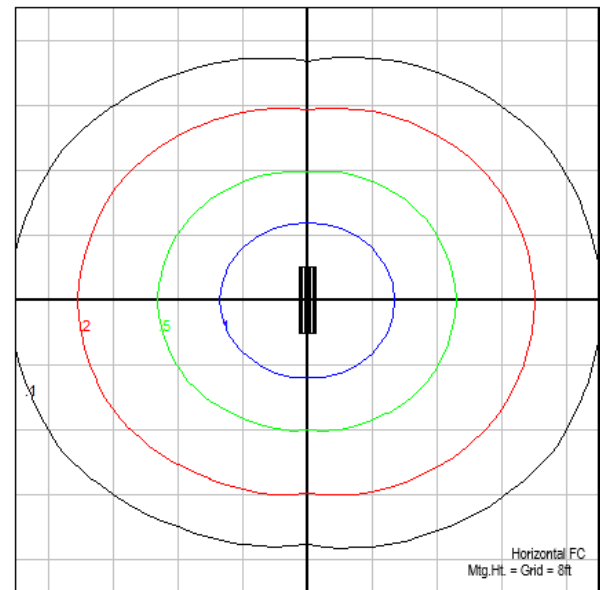


Efficacy: 126lm/W
Luminaire Type: Semi-Direct
UL Classification: Damp Location Listed
DLC Number: PL32WR8G57OX

CBCP: 776cd
Spacing Criteria: 1.18(0-180) 1.34(90-270)
Ambient Operating Temp: -30C to +40C
CCN Number: IFAM7.E359675

Project:	
Location:	
Model#: SLNB220SW-WRV	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

SPD

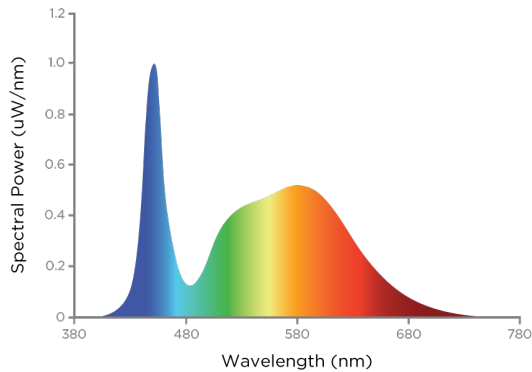

Source Type: LED

CRI: >80

Duv: 0.0013

Manufacturer: Runlite

L70: 50000 Hrs.

Part Number: X2835X series

Colour Temperature: 3500K, 4000K, 5000K Field Selectable

ELECTRICAL SPECIFICATIONS

Driver Manufacturer: ARC Smart Electronic Co., Ltd.

Input Frequency: 50/60 hz

Current Draw at 277Vac: 0.2083A

Max On-Delay: < 0.75 S

Driver MTBF: 320,000 hrs

Dimming: 0-10Vdc, (0% Min Light Level)

Short Circuit Protection: Auto Recovery.
The output shall return to normal when the fault condition is removed.

Driver Part Number: ARC-DI-25I600-MUV-D1-R.

Fixture Draw: 20W

Current Draw at 347Vac: 0.0720A

Power Factor at 120Vac: > 0.90

Max Operating Case Temperature: 90C

Dimming Current mA: .5mA draw

Driver Certifications: c-RU-us Class 2, FCC Part 15 Class B, RoHS

Input Voltage: 120-347Vac

Current Draw at 120Vac: 0.2315

Inrush Current: 30A peak, 1.2ms duration, < 0.25A2S at 120Vac, Cold Start

THD at 120Vac(%): < 20%

Surge Suppression: 2kV (Line-Line), 4kV (Line-Earth)

Over Temperature Protection: Auto Recovery. The output shall return to normal when the temperature returns to normal.

PHYSICAL SPECIFICATIONS

Finish Colour: White

Mounting: Surface, Suspended

Lens Type: Frosted

Finish Type: Textured powder coat over chromate conversion coat

Housing Material: Heavy Gauge Steel

Reflector Material: Painted Steel

Wiring: Back and End Knock outs with luminaire disconnect

Lens Material: PMMA

Entries: Knockouts, ends and backside



Project:	
Location:	
Model#: SLNB220SW-WRV	Type:
Client:	Qty:
Prepared by:	Date:

SHIPPING INFORMATION

OrderingCode(s): SLNB220SW-WRV

Box Weight: 2 kg


Box Quantity: 1

Box Dimensions (L-W-H): 610 x 70 x 95 mm

Project:	
Location:	
Model#: SLNB220SW-WRV	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

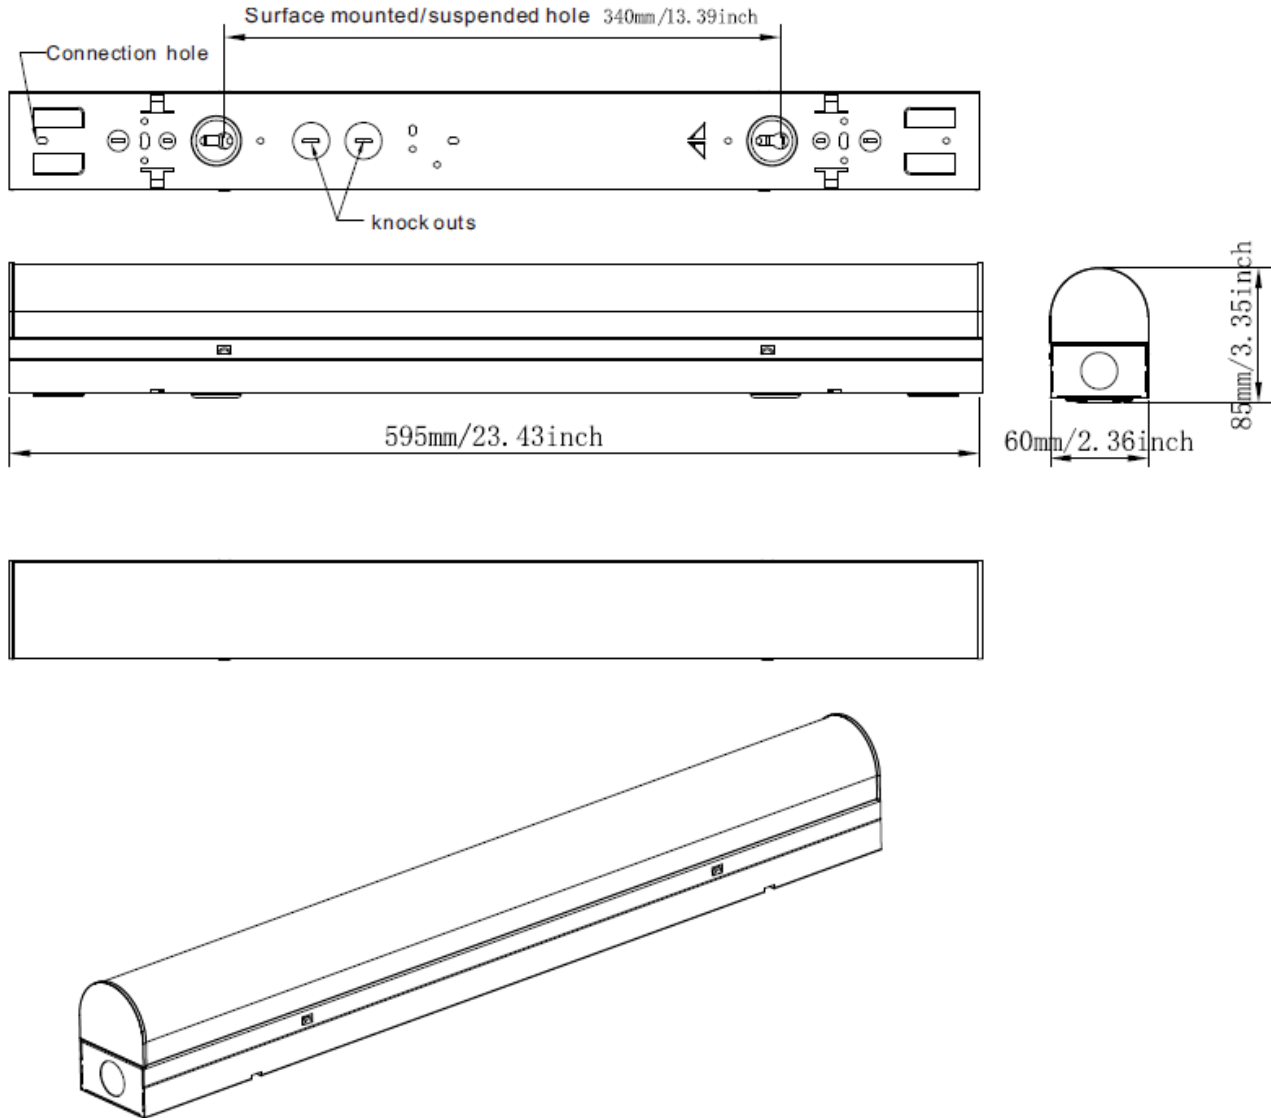



Project:	
Location:	
Model#: SLNB220SW-WRV	Type:
Client:	Qty:
Prepared by:	Date:

SERIES ARCHITECTURE

Series Architecture

SLNB - - - - -											
Part	Length	Wattage		CCT		Mounting		Voltage		Finish	
SLNB	2 2FT	20	20W	SW	Selectable	Blank	Surface	WRV	120-347VAC	Blank	White
	3 3FT	30	30W		White						
	4 4FT	40	40W		35K, 40K, 50K						
	8 8FT	80	80W								

2FT	10W	15W	20W
3500K	1325 lm	1723 lm	2650 lm
4000K	1350 lm	1755 lm	2700 lm
5000K	1400 lm	1820 lm	2800 lm