

Project:	
Location:	
Model#: TLG454K-UN4-BK-OC	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




To supply TamLite's TLG Series of LED Garage fixture as specified. The luminaire shall operate at 347Vac. The housing shall be constructed of Die-Cast Aluminium with a powder coat finish over chromate conversion treatment with clear, acrylic lenses. The luminaire shall be wet location listed. LEDs shall be as specified Nichia ® LED chips. The luminaire shall be cULus Listed and DLC Listed.




PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

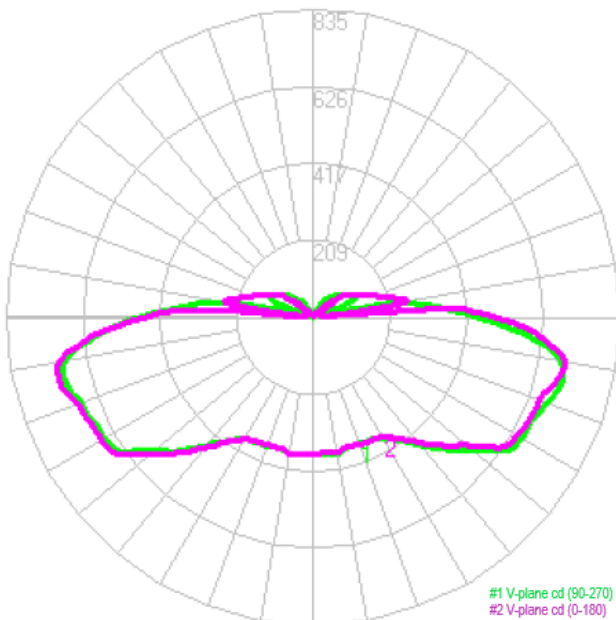

Isolux Diagram

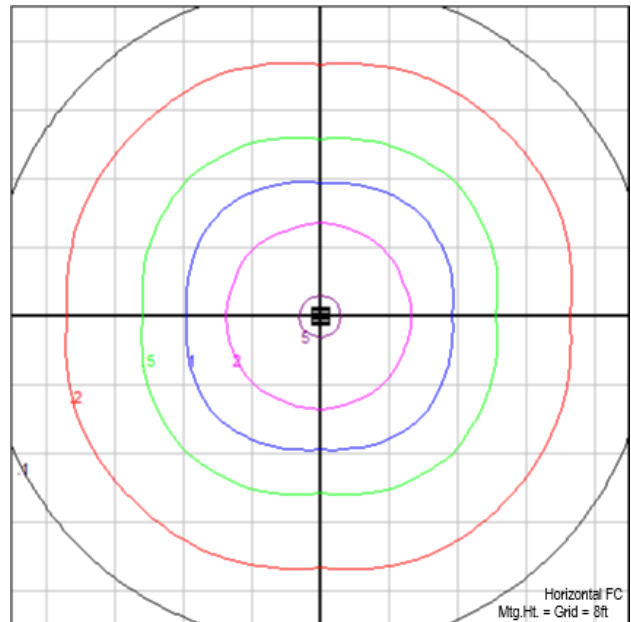

Project:	
Location:	
Model#: TLG454K-UN4-BK-OC	Type:
Client:	Qty:
Prepared by:	Date:

Zonal Lumen Summary

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	35.38	40-50	380.52	80-90	718.92	120-130	83.99	160-170	0.31
10-20	104.24	50-60	566.29	90-100	351.15	130-140	41.34	170-180	0.01
20-30	171.63	60-70	729.3	100-110	138.4	140-150	16.53	--	--
30-40	251.61	70-80	798.61	110-120	122.75	150-160	4.21	--	--

Initial Lumen Output: 4515lm

Environmental Rating(s): IP65

Certification Standards: UL Safety US-CA

Efficacy: 110.09lm/W

UL Classification: Wet Location Listed

CCN Number: IFAM7.E359675


Luminaire Type: Surface Mount

Ambient Operating Temp: -25C to +40C

Limited Product Warranty: 5 Year(s)

LED SPECIFICATIONS

SPD

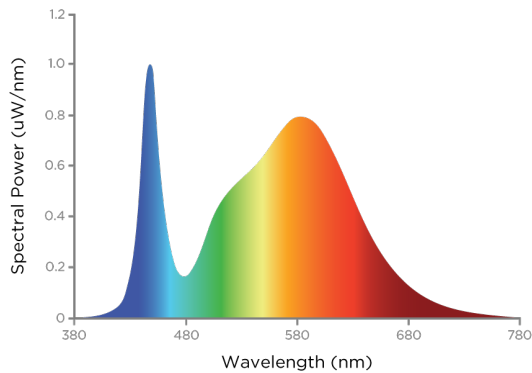

Source Type: LED

L70: 60000 Hrs

Manufacturer: Nichia ®

Colour Temperature: 4000K

CRI: >75

Duv: 0.005



Project:	
Location:	
Model#: TLG454K-UN4-BK-OC	Type:
Client:	Qty:
Prepared by:	Date:

ELECTRICAL SPECIFICATIONS

Input Voltage: 347Vac

Current Draw@347Vac: .1268A

THD @ 120Vac(%): <10%

Short Circuit Protection: Auto recovery.

The output shall return to normal when the fault condition is removed.

Input Frequency: 50-60Hz

Max On-Delay: < 1.000S

Dimming: 0-10Vdc, (0% Min Light Level)

Driver Certifications: c-RU-us Class 2,

FCC Part 15 Class B, RoHS

Fixture Draw: 44W

Power Factor @120Vac: >.90

Over Temperature Protection: Auto recovery. Current returns to normal after over temperature is removed.

OCCUPANCY SENSOR INFORMATION

Sensor Type: Passive Infrared (PIR) - Outdoor

Programing Type: Remote Infrared

Control Type: On-Dim (10%Minimum)

Input Voltage: 12VDC

PHYSICAL SPECIFICATIONS

Finish Colour: Black (RAL-9011)

Housing Material: ADC12 Aluminium

Finish Type: Textured powder coat over chromate conversion coat

Lens Material: PMMA

Mounting: Surface

Lens Type: Clear

SHIPPING INFORMATION

OrderingCode(s): TLG454K-UN4-BK-O


Box Quantity: 1

Box Dimensions (L-W-H): 350 x 350 x 180 mm

Project:	
Location:	
Model#: TLG454K-UN4-BK-OC	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

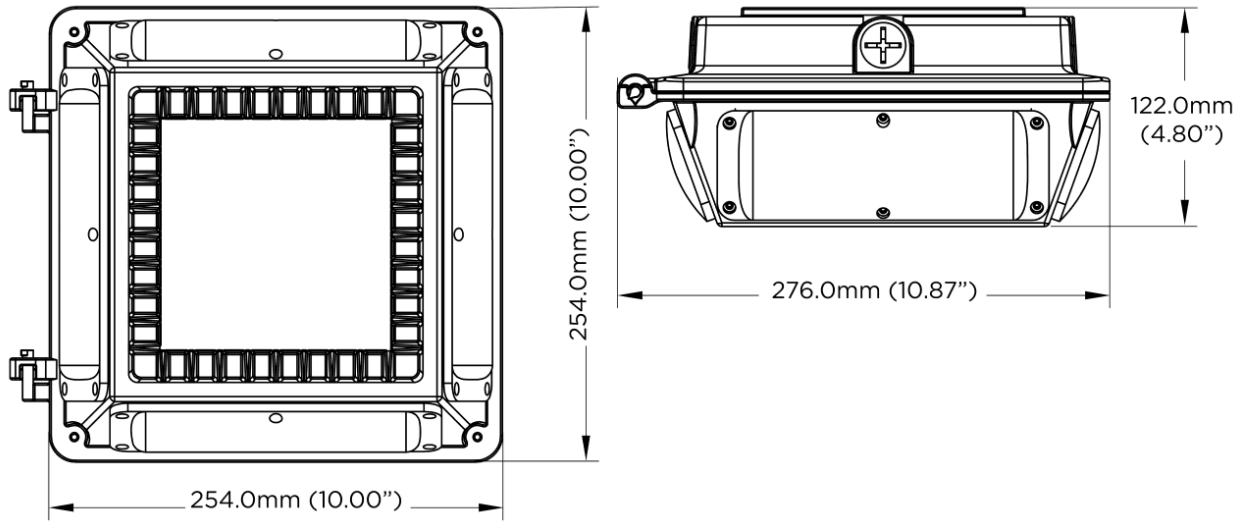

SERIES ARCHITECTURE

Series Architecture

TLG -	45 -	40K -	UNV -	WH -		
Part	Wattage		CCT	Voltage		Options
TLG	45	45W	40K	4000K	UNV	120-277VAC
	85	85W	50K	5000K	UN4	347VAC
					WH	White
					BK	Black
					BZ	Bronze
					OC	Occupancy Sensor*
					FSIR-100	*FSIR-100 Programmer

Optional Extras: FSIR-100 IR Programmer