

Project:	
Location:	
Model#: TLG454K-UN4-BK	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




To supply TamLite's TLG Series of LED Garage fixture as specified. The luminaire shall operate at 347Vac. The housing shall be constructed of Die-Cast Aluminium with a powder coat finish over chromate conversion treatment with clear, acrylic lenses. The luminaire shall be wet location listed. LEDs shall be as specified Nichia ® LED chips. The luminaire shall be cULus Listed and DLC Listed.




PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

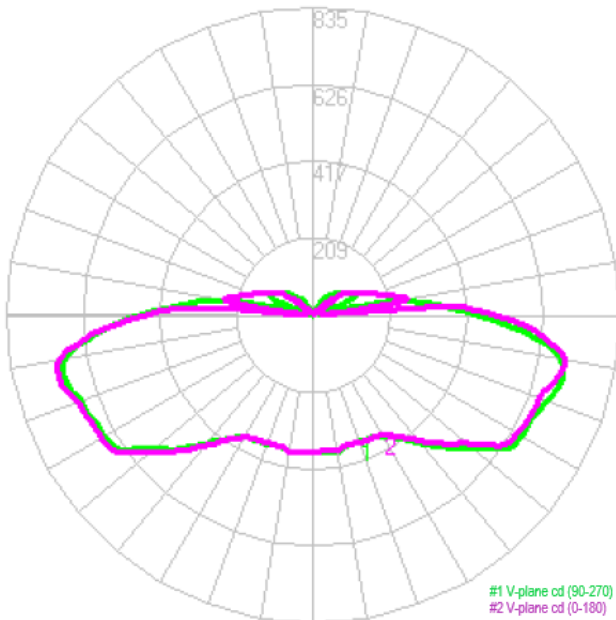

Isolux Diagram

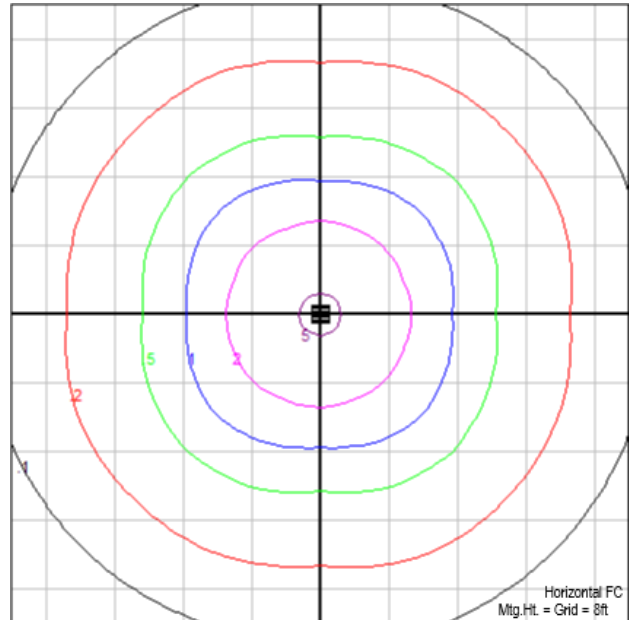

Project:	
Location:	
Model#: TLG454K-UN4-BK	Type:
Client:	Qty:
Prepared by:	Date:

Zonal Lumen Summary

ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS	ZONE	LUMENS
0-10	35.38	40-50	380.52	80-90	718.92	120-130	83.99	160-170	0.31
10-20	104.24	50-60	566.29	90-100	351.15	130-140	41.34	170-180	0.01
20-30	171.63	60-70	729.3	100-110	138.4	140-150	16.53	--	--
30-40	251.61	70-80	798.61	110-120	122.75	150-160	4.21	--	--

Initial Lumen Output: 4515lm

Environmental Rating(s): IP65

Certification Standards: UL Safety US-CA

Efficacy: 110.09lm/W

UL Classification: Wet Location Listed

CCN Number: IFAM7.E359675


Luminaire Type: Surface Mount

Ambient Operating Temp: -25C to +40C

Limited Product Warranty: 5 Year(s)

LED SPECIFICATIONS

SPD

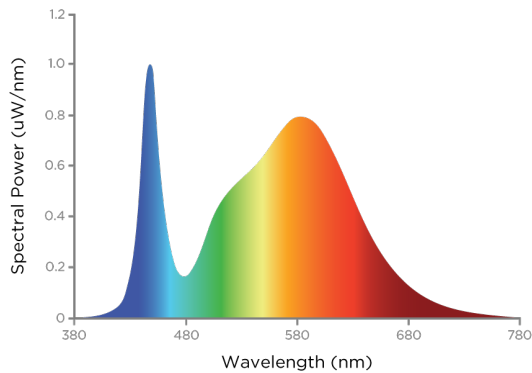

Source Type: LED

L70: 60000 Hrs

Manufacturer: Nichia ®

Colour Temperature: 4000K

CRI: >75

Duv: 0.005

Project:	
Location:	
Model#: TLG454K-UN4-BK	Type:
Client:	Qty:
Prepared by:	Date:

ELECTRICAL SPECIFICATIONS

Input Voltage: 347Vac
Current Draw@347Vac: .1268A
THD @ 120Vac(%): <10%
Short Circuit Protection: Auto recovery.
 The output shall return to normal when the fault condition is removed.

Input Frequency: 50-60Hz
Max On-Delay: < 1.000S
Dimming: 0-10Vdc, (0% Min Light Level)
Driver Certifications: c-RU-us Class 2,
 FCC Part 15 Class B, RoHS

Fixture Draw: 44W
Power Factor @120Vac: >.90
Over Temperature Protection: Auto recovery. Current returns to normal after over temperature is removed.

PHYSICAL SPECIFICATIONS

Finish Colour: Black (RAL-9011)
Housing Material: ADC12 Aluminium

Finish Type: Textured powder coat over chromate conversion coat
Lens Material: PMMA

Mounting: Surface
Lens Type: Clear

SHIPPING INFORMATION


OrderingCode(s): TLG454K-UN4-BK

Box Quantity: 1

Box Dimensions (L-W-H): 350 x 350 x 180 mm

LINE DRAWING

Line Drawings

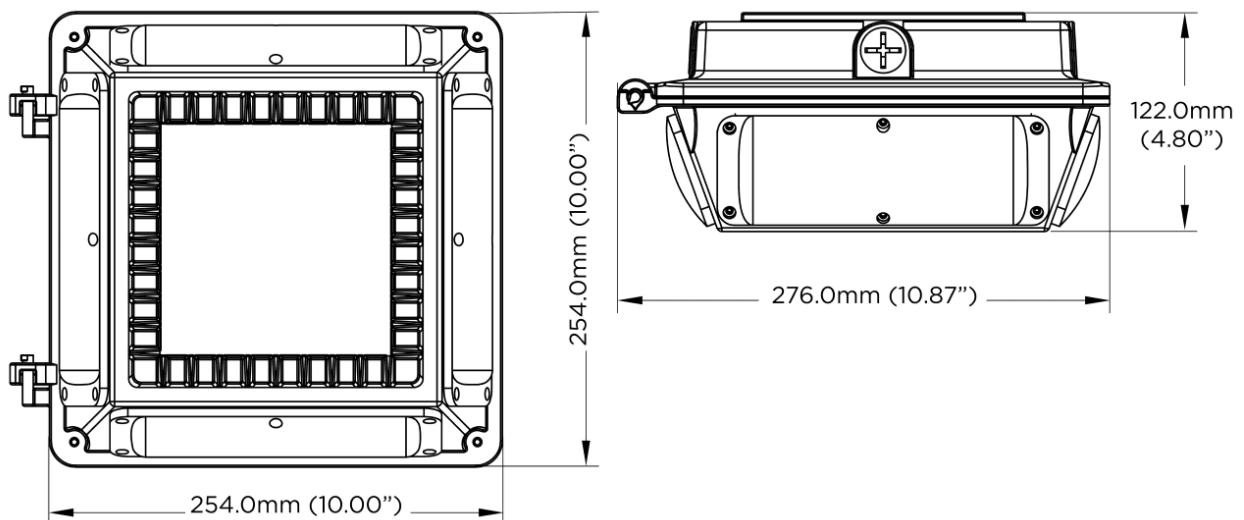



Project:	
Location:	
Model#: TLG454K-UN4-BK	Type:
Client:	Qty:
Prepared by:	Date:

SERIES ARCHITECTURE

Series Architecture

TLG -		45 -		40K -		UNV -		WH -			
Part	Wattage		CCT		Voltage		Finish		Options		
TLG	45	45W	40K	4000K	UNV	120-277VAC	WH	White	OC	Occupancy Sensor*	
	85	85W	50K	5000K	UN4	347VAC	BK	Black	FSIR-100	*FSIR-100 Programmer	
							BZ	Bronze			

Optional Extras: Occupancy Sensor, FSIR-100 IR Programmer