


Project:	
Location:	
Model#: MWP155K-120-BZ-PC	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




To supply Tamlite MWP15 series of LED fixtures as specified. The body shall be polycarbonate and mount to an aluminum back plate. The LEDs shall be 5000K in CCT. The luminaire shall be cETLus and DLC listed.



PERFORMANCE SPECIFICATIONS

Isolux Diagram

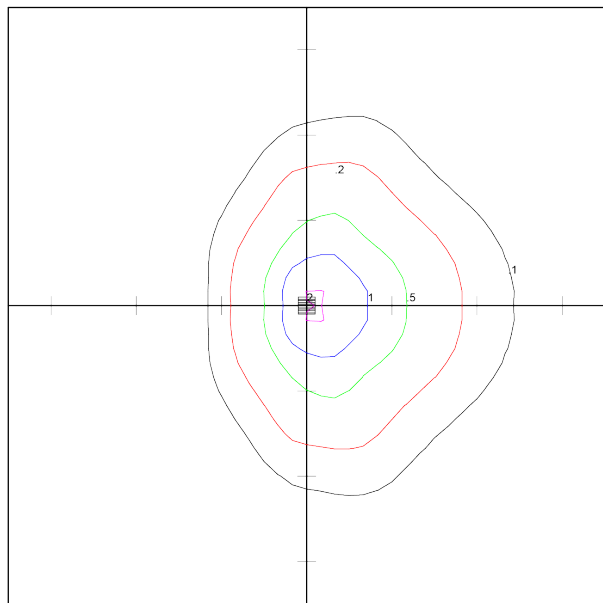

Tamlite Lighting Canada
TLMW14LED/PC
14W LED MINI WALL PACK WITH PHOTO CELL

Horizontal Footcandles
Scale: 1 Inch = 10 Ft.
Light Loss Factor = 1.00
Lumens Per Lamp = N.A. (absolute photometry)
Luminaire Lumens = 986
Mounting Height = 10.00 Ft
Maximum Calculated Value = 2.03 Fc
Arrangement: Single

Initial Lumen Output: 986lm

UL Classification: Wet Location Listed

DLC Number: PLHH3S66Z411

Efficacy: 76lm/W

Ambient Operating Temp: -20C to +40C

CCN Number: IFAM7.E359675

Max Candela: 232cd at H15 V20


Certification Standards: UL Safety US-CA
, DLC

Limited Product Warranty: 5 Year(s)

Project:	
Location:	
Model#: MWP155K-120-BZ-PC	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

SPD

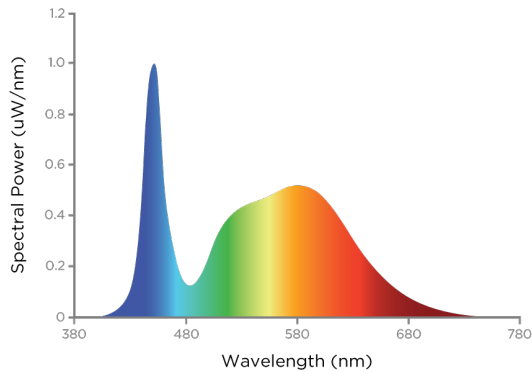

Source Type: LED
Colour Temperature: 5000K

CRI: >80
Chromaticity: x=0.3462 y=0.3583

L90: 50,000 Hrs

ELECTRICAL SPECIFICATIONS

Input Voltage: 120Vac
Current Draw@ 120Vac: 0.1250A

Input Frequency: 50-60Hz
Power Factor @120Vac: >.90

Fixture Draw: 13.04W

PHYSICAL SPECIFICATIONS

Housing Material: Aluminium Back Plate

Lens Material: Prismatic Polycarbonate

SHIPPING INFORMATION

OrderingCode(s): MWP155K-120-BZ-PC
Box Weight: 1.48 kg
Carton Weight: 6.1 kg

Box Quantity: 1
Carton Quantity: 4

Box Dimensions (L-W-H): 310 x 210 x 125 mm
Carton Dimensions (L-W-H): 640 x 440 x 395 mm

Project:	
Location:	
Model#: MWP155K-120-BZ-PC	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

