


Project:	
Location:	
Model#: RHR1-MULTI-WP	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




The RHR Series is a thermoplastic wet location remote head designed for indoor and outdoor applications. To be used as part of an Emergency lighting system providing illumination for the path of egress.



PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

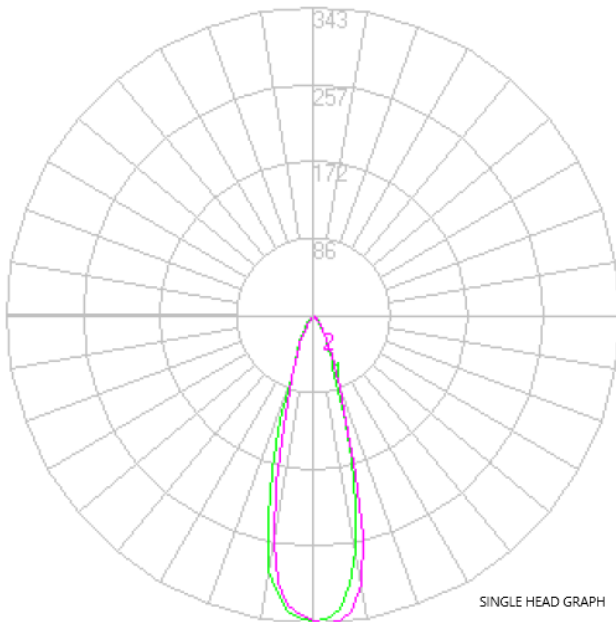

Initial Lumen Output: 100 lm

Luminaire Type: Remote head

Certification Standards: UL924, C22.2
No. 141-15

Efficacy: 100 lm/W

Environmental Rating(s): Wet location

Limited Product Warranty: 3 years for
fixture

Beam Angle: 27.40

Ambient Operating Temp: -25°C to 50°C /
-13°F to +122°F



Project:	
Location:	
Model#: RHR1-MULTI-WP	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

Source Type: LED CRI: > 80 L70: >54,000 Hrs
Colour Temperature: 5700K

ELECTRICAL SPECIFICATIONS

Input Voltage: 3-12VDC Fixture Draw: 1W Max On-Delay: 1S
Max Operating Case Temperature: 50? Over Temperature Protection: YES Short Circuit Protection: YES

EMERGENCY INFORMATION

Input Voltage: 3-12VDC Max Power Input: 1W Emergency Certifications: Meets UL 924,
cULus, NFPA 101 Life Safety Code, NEC,
OSHA, Local and State Codes

PHYSICAL SPECIFICATIONS

Finish Colour: White Mounting: Wall, ceiling Housing Material: Aluminium /
Lens Material: Polycarbonate Reflector Material: ABS Polycarbonate
Weight: 0.24 kg

SHIPPING INFORMATION

OrderingCode(s): 0627-8562 RHR1- Box Quantity: 1 Box Dimensions (L-W-H): 127 x 127 x 178
MULTI-WP ROUND REMOTE HEAD - 1 Carton Dimensions (L-W-H): 380 x 350 x mm / 5 x 5 x 7 inches
HEAD 260 mm / 0.1 x 0 x 380 inches Carton Weight: 003.9 Kg
Carton Quantity: 12

Project:	
Location:	
Model#: RHR1-MULTI-WP	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

